


A-90 Scaffold Bracket Jack

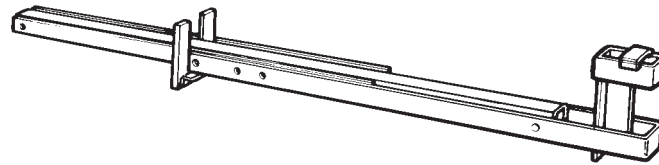


A-90 Scaffold Bracket Jack

Dayton Superior A-90 Scaffold Bracket Jack meets state building codes and OSHA minimum requirements and is used to support scaffolding on nearly any type of formwork. By changing the position of the pins in the vertical and horizontal members the bracket can be quickly adjusted to fit 2x4, 2x6 or 2x8 wales or positioned flush against a wall.

Attachment can be made to a concrete wall by attaching the bracket to an exposed coil tie, insert or other appropriate device. The bracket has a 1" diameter pipe coupling welded to the vertical leg which can be used in conjunction with a six inch long pipe nipple to attach the bracket to an exposed she-bolt inside rod.

The A-90 Scaffold Bracket Jack folds for easy storage and convenient shipping.

Replacement parts for the A-90 bracket are available on special order, contact a Dayton Superior Service Center for cost and availability.

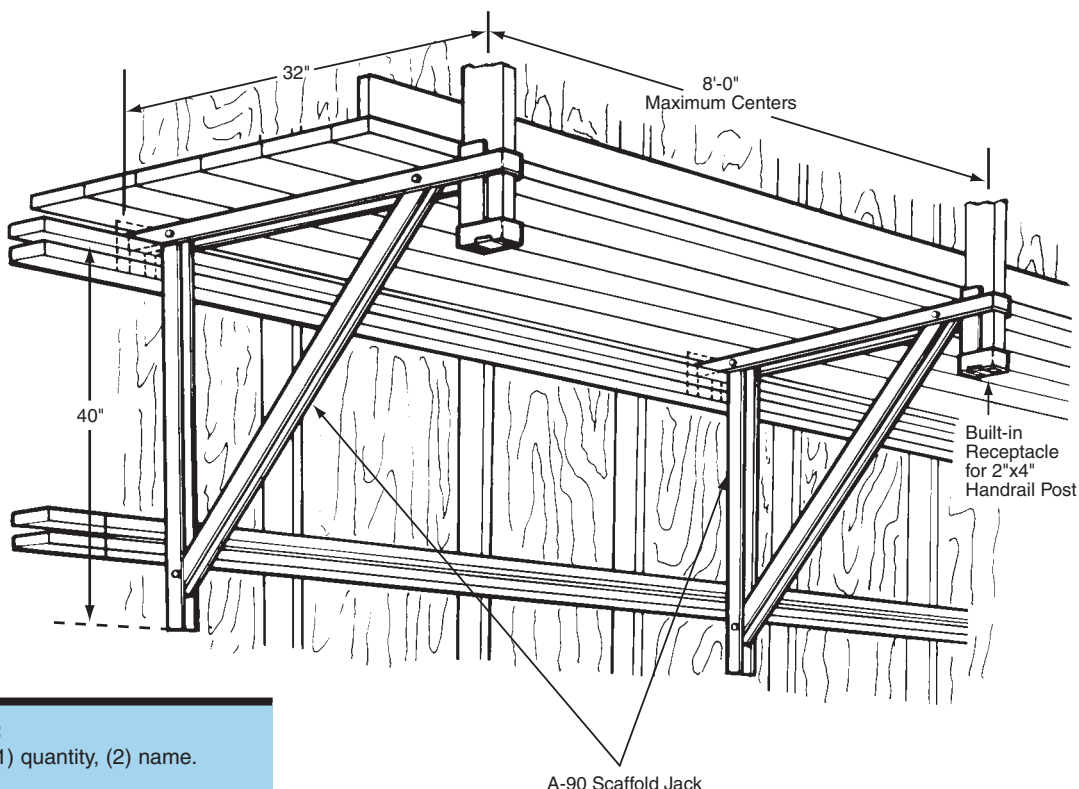

To Order:

Specify: (1) quantity, (2) name.

Example:

250 pcs. A-90 Scaffold Bracket Jack.