


## Perforated Base Insul-hangers

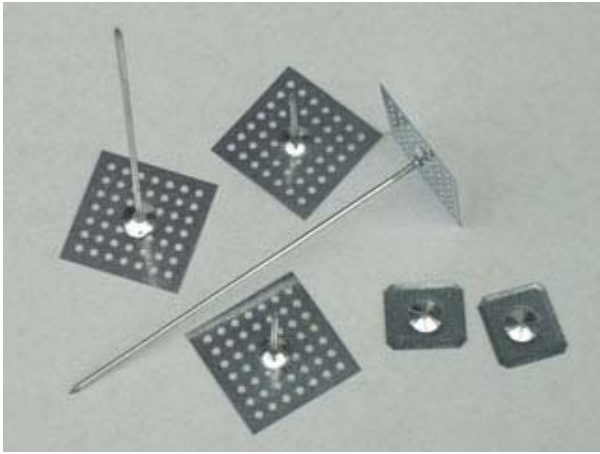

TACTOO® Insul-Hangers have 12 ga (.106"/2.7mm) diameter mild steel spindles with a corrosion resistant coating. The perforated base plate is 2" (51mm) square and is made of galvanized steel. Standard lengths range from 1" (25mm) through 9 1/2" (241mm) and are packed 1,000 pieces per carton up to 2 1/2" (64mm); 500 pieces per carton for longer sizes.

9 1/2" (241mm) are packed 250 pieces per carton. Other materials (Stainless Steel, Aluminum), packaging (100 packs), lengths and configurations (curved base, nibbed) are available on special order. Please request price list for standard lengths and shipping weights.

A complete line of [Self-Locking Washers](#) in various styles and materials is available for use with TACTOO® Insul-Hangers. See Spec Sheet No. SLW-1 for more details.

**TACTOO® Insul-Hangers are secured with General Purpose Adhesive, specially formulated to bond to metal, masonry and other sound substrates. Surfaces must be clean and dry before adhesive is applied. Some protective coatings are not compatible with adhesives and it is recommended that the user make test bonds before proceeding with the application. Please see AGM Spec. [Sheet GPA](#) for more complete information regarding use, application, storage, etc.**

AGM Industries, Inc.  
16 Jonathan Drive, Brockton, MA 02301  
Tel:(508) 587-3900 Fax:(508) 587-3283 Toll Free: 800-225-9990