


Stainless Steel Strapping

Ideal Products' Stainless Steel strapping is made from T-304 Series Stainless Steel, which meets ASTM A-240 standards. Ideal Products' strapping is manufactured from a soft annealing, making it easy to handle. It is available in both 1/2" and 3/4" widths and in 0.015" and 0.020" thicknesses. Ideal Products has "No Asbestos" engraved strapping to help identify asbestos free insulation areas. Asbestor free banding is stocked in 1/2" width by 0.020" thickness.

1/2" Strapping 0.015" -Bright Annealed
-Mill Finish

1/2" Strapping 0.020" -Bright Annealed
-Mill Finish
-No Asbestos

3/4" Strapping 0.020" -Bright Annealed

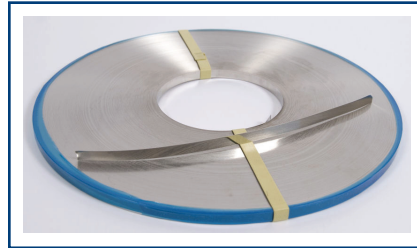

Stainless Steel FabStraps

Ideal Products' Fabstraps are made from T-304 Series Stainless Steel conforming to ASTM A-240 standards. Fabstraps are supplied at specific lengths with a wing seal attached, therefore ready to use. Fabstraps are cut to the right length every time, to help save time and money in the field when securing cladding and insulation in place. They are supplied in 1/2" and 3/4" widths.

Stainless Steel Wing Seal

Stainless Steel Wing Seals are available in 1/2" and 3/4" widths. They are made from 0.025" thick, heavy duty 300 Series Stainless Steel.



Stainless Steel Closed Seals

Stainless Steel closed seals are available in 1/2" and 3/4" widths. They are made from 0.025" thick heavy duty 300 Series Stainless Steel. Closed Seals are designed to be used for diameters of 8' and over. A standard seal tool is required for use with this particular seal. Closed seals ensure a stronger closure over wing seals on high tension or expansion spring applications.

Stainless Steel Tie Wire

Ideal Products' Tie Wire is manufactured from T-304 Stainless Steel, and is available in both 16 and 18 gauge.

